
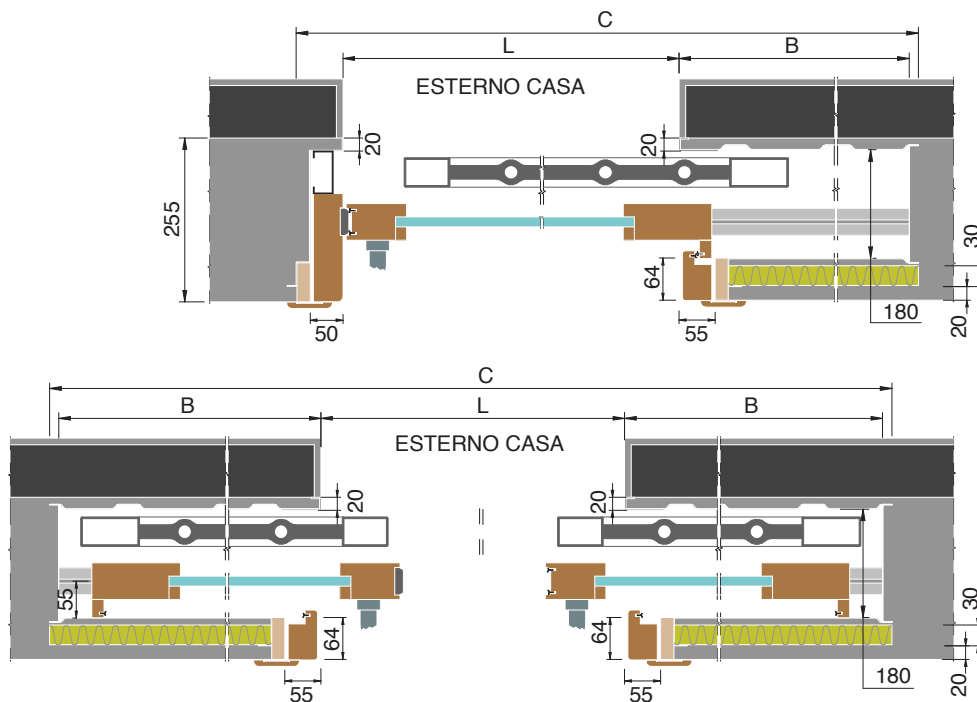


Maxima

Scheda  
Tecnica

Ermetika®  
LIVE YOUR SPACE

## Iride

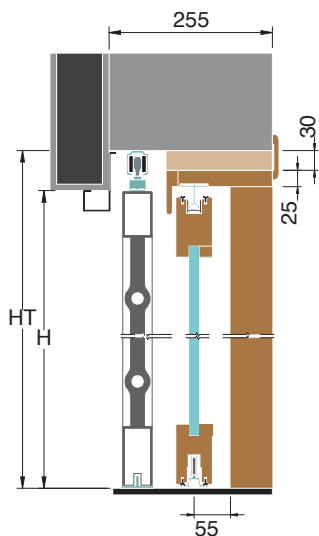

Spessore max infisso	Spessore max anta est.
68	55

Luce Architettonica Singolo			
L	H	SP	SI
600 ÷ 1800	800 ÷ 1400	255	180
600 ÷ 1800	1401 ÷ 1800	255	180
600 ÷ 1800	1801 ÷ 2300	255	180
600 ÷ 1800	2301 ÷ 2600	255	180
600 ÷ 1800	2601 ÷ 2900	255	180

Luce Architettonica Doppio			
L	H	SP	SI
1200 ÷ 3600	800 ÷ 1400	255	180
1200 ÷ 3600	1401 ÷ 1800	255	180
1200 ÷ 3600	1801 ÷ 2300	255	180
1200 ÷ 3600	2301 ÷ 2600	255	180
1200 ÷ 3600	2601 ÷ 2900	255	180



### Scheda tecnica



### Ingombro in Larghezza

Singolo - Luce architettonica (L) x 2 + 190  
(Es. 800x2+190 = 1790)  
Doppio - Luce architettonica (L) x 2 + 180  
(Es. 1600x2+180 = 3380)

### Ingombro in Altezza

Luce architettonica (H) + 80  
(Es. 2100+80 = 2180)



### Fuori standard

Dimensioni realizzabili:  
L Variabili da mm 1500 a mm 1800 singolo;  
L Variabili da mm 3000 a mm 3600 doppio



### Caratteristiche

- Resistenza al carico di vento
- Permeabilità all'aria
- Tenuta all'acqua
- Resistenza all'urto

### Accessori

- Grata di sicurezza