


Absolute Energy Single Door

Plastered and plasterboard wall



Absolute Energy single door

plastered and plasterboard wall

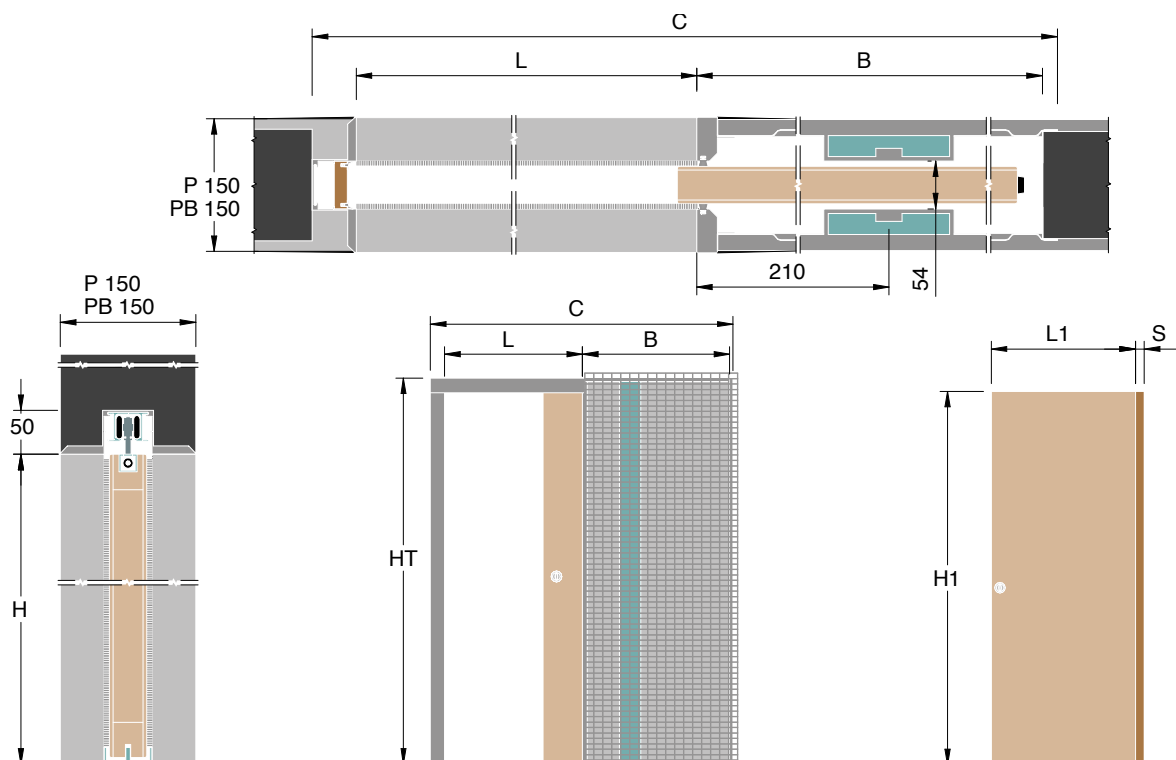


COD.	PASSAGE OPENING L X H	DOOR SIZE L1 X H1	L	B	C	HT
IEN.0605B	600 X 2100	615 X 2092	600	640	1310	2150
IEN.0605A	600 X 2000	615 X 1992	600	640	1310	2050
IEN.0705B	700 X 2100	715 X 2092	700	740	1510	2150
IEN.0705A	700 X 2000	715 X 1992	700	740	1510	2080
IEN.0805B	800 X 2100	815 X 2092	800	840	1710	2150
IEN.0805A	800 X 2000	815 X 1992	800	840	1710	2050
IEN.0905B	900 X 2100	915 X 2092	900	940	1910	2150
IEN.0905A	900 X 2000	915 X 1992	900	940	1910	2050
IEN.1005B	1000 X 2100	1015 X 2092	1000	1040	2110	2150
IEN.1005A	1000 X 2000	1015 X 1992	1000	1040	2110	2050

FINISHED WALL	CAVITY SIZE	DOOR THICKNESS "S"
PLASTER		
150	54	42**
PLASTERBOARD		
150	54	42**

ATTENTION
Door thickness shall not differ from size in the table.

** Door thickness includes glass frames. The net passage opening is reduced by 10 mm. (Example: passage opening 800 mm = net opening 790 mm)

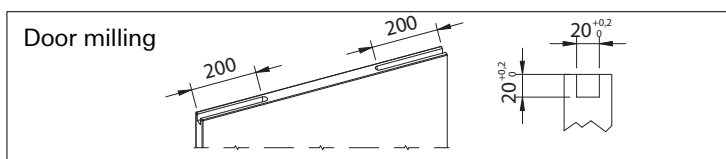

Technical sheet



Overall length

Passage opening (L) x 2 + 110
(Example 800x2+110 = 1710)

Overall height..

Passage opening (H) + 50
(Example 2100+50 = 2150)

2 little electrical boxes are supplied with standard equipment.



Custom size*

Available dimensions:
H From 1000 to 2600 mm
L From 600 to 1200 mm

* The technical department reserves the right to evaluate custom size feasibility..



Accessories

- Glass Kit
- 120 kg track kit
- Under door profile
- Easy-Stop AB