


# Absolute Smart Horizontal



## Absolute Smart horizontal

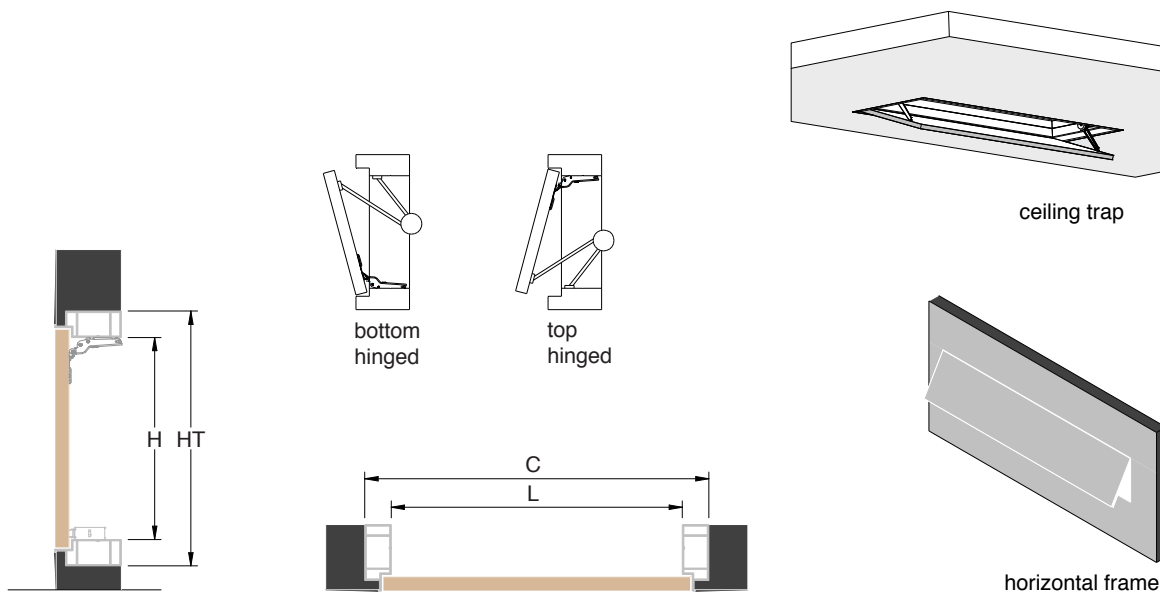

PASSAGE OPENING L	PASSAGE OPENING H	C	HT
300-700		370-670	
701-1000		771-1070	
1001-1500	300-500	1071-1570	370-570
1501-2100		1571-2070	

### Hinges

n. 2 (H) 300 ÷ 700 mm;  
n. 3 (H) 701 ÷ 1200 mm;  
n. 4 (H) 1201 ÷ 1800 mm;  
n. 5 (H) 1801 ÷ 2100 mm;



Technical sheet



### Overall dimension

Formulas to calculate overall dimension  
 $C = L + 70$   
 $HT = H + 70$



### Standard equipment

Aluminum frame aw6060; n.01 factory-equipped open/close push accessory, set in the middle of the system height (2 push pull for systems higher than mm 1000); factory-equipped hinges with 110° opening; factory-equipped tilt&turn hardware system: n 1 pc for l up to 500 mm, n 2 pcs for l >501 mm; wood panel ready to be varnished.



### Accessories

- Hinges with 90° opening
- Hinges with 155° opening
- Reinforcement bar (compulsory for systems longer than mm 1500)
- Additional push-pull
- Cylinder lock