



Absolute Swing

Plastered and plasterboard wall



Absolute Swing

plastered and
plasterboard wall

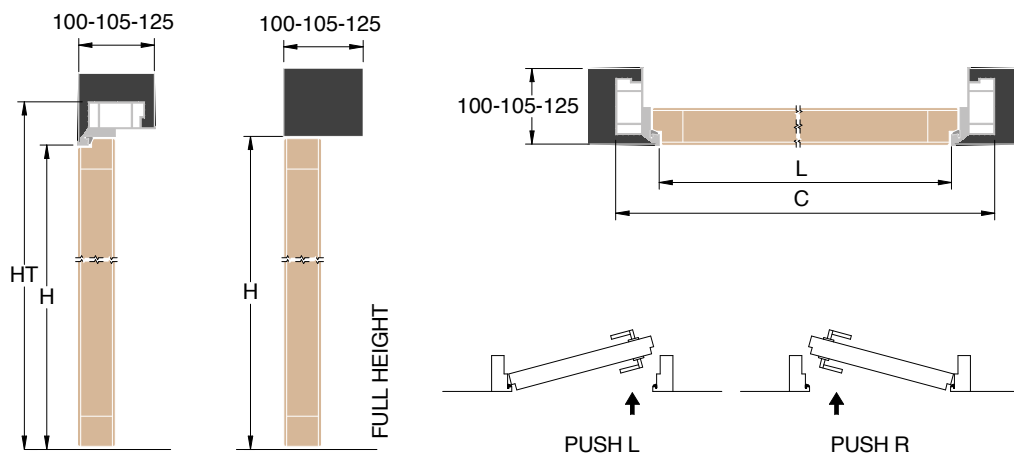

In the version for plastered wall the frame is provided with n 6 zinc coated metal fixing clips that allow a safe grasp to brick and a fiber net to strengthen the junction points of the frame.

Standard Dimensions

PASSAGE OPENING L	PASSAGE OPENING H	C	HT	SP
600		720		105/125* 100/125**
700		820		
800	2000/2100	920	2060/2160	
900	2400	1020	2460	
1000		1120		
1100		1220		

Panels lower than 2400 mm = 3 hinges, higher than or equal to 2400 = 4 hinges

Custom Size

PASSAGE OPENING L	PASSAGE OPENING H	C	HT	SP
600		720		105/125* 100/125**
700		820		
800	1500/2300	920	1560/2360	
900	2301/2700	1020	2360/2760	
1000	2701/3000	1120	2760/3060	
1100		1220		

*plaster / **plasterboard



Technical sheet



Overall length

Passage opening
(L) + 120 mm

Overall height..

Passage opening
(H) + 60 mm



Custom size

Available dimensions:
H From 1000 to 3000 mm
L From 600 to 1100 mm



Accessories

- Invisible white hinge
- Traditional lock with reversible spring latch
- Roller latch lock
- Recessed handle to pull
- Self-closing kit for invisible door
- Recessed handle flush with door