


# Luminox Single Door

Plastered and plasterboard wall



## Luminox single door

plastered and plasterboard wall

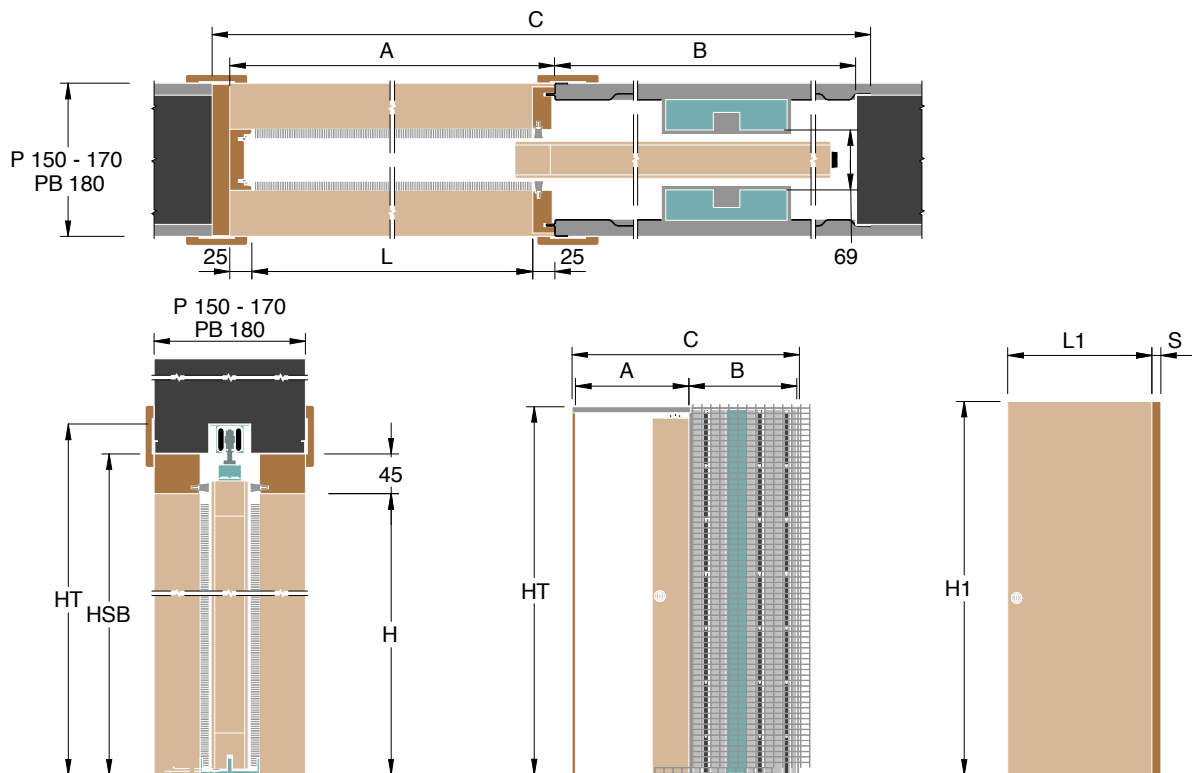

FINISHED WALL	CAVITY SIZE	BOX THICKNESS
<b>PLASTER</b>		
150	69	40
170	69	50
<b>PLASTERBOARD</b>		
180	69	50
Door thickness "S" 42		

COD.	PASSAGE OPENING L X H	DOOR SIZE L1 X H1	A	B	C	HSB	HT
ILU.060SB	600 X 2100	615 X 2110	650	600	1300	2145	2180
ILU.060SA	600 X 2000	615 X 2010	650	600	1300	2045	2080
ILU.070SB	700 X 2100	715 X 2110	750	700	1500	2145	2180
ILU.070SA	700 X 2000	715 X 2010	750	700	1500	2045	2080
ILU.080SB	800 X 2100	815 X 2110	850	800	1700	2145	2180
ILU.080SA	800 X 2000	815 X 2010	850	800	1700	2045	2080
ILU.090SB	900 X 2100	915 X 2110	950	900	1900	2145	2180
ILU.090SA	900 X 2000	915 X 2010	950	900	1900	2045	2080
ILU.100SB	1000 X 2100	1015 X 2110	1050	1000	2100	2145	2180
ILU.100SA	1000 X 2000	1015 X 2010	1050	1000	2100	2045	2080

### ATTENTION

Do not use door panels thicker than the size expressed in the table

Two back boxes are provided in standard equipment (only for 150mm walls)



Technical sheet



#### Overall length

Passage opening (L) x 2 + 100  
(Example 800x2+100 = 1700)

#### Overall height..

Passage opening (H) + 80  
(Example 2100+80 = 2180)



#### Custom size

Available dimensions:  
H From 1000 to 2700 mm  
L From 600 to 1500 mm



#### Accessories

- Easy-Stop
- Sliding kit for glass door
- Self-closing kit
- 120 kg track kit
- Under door profile
- Mag Evo