


Bellavista

Scheda  
Tecnica



Ermetika®  
LIVE YOUR SPACE

## Iride

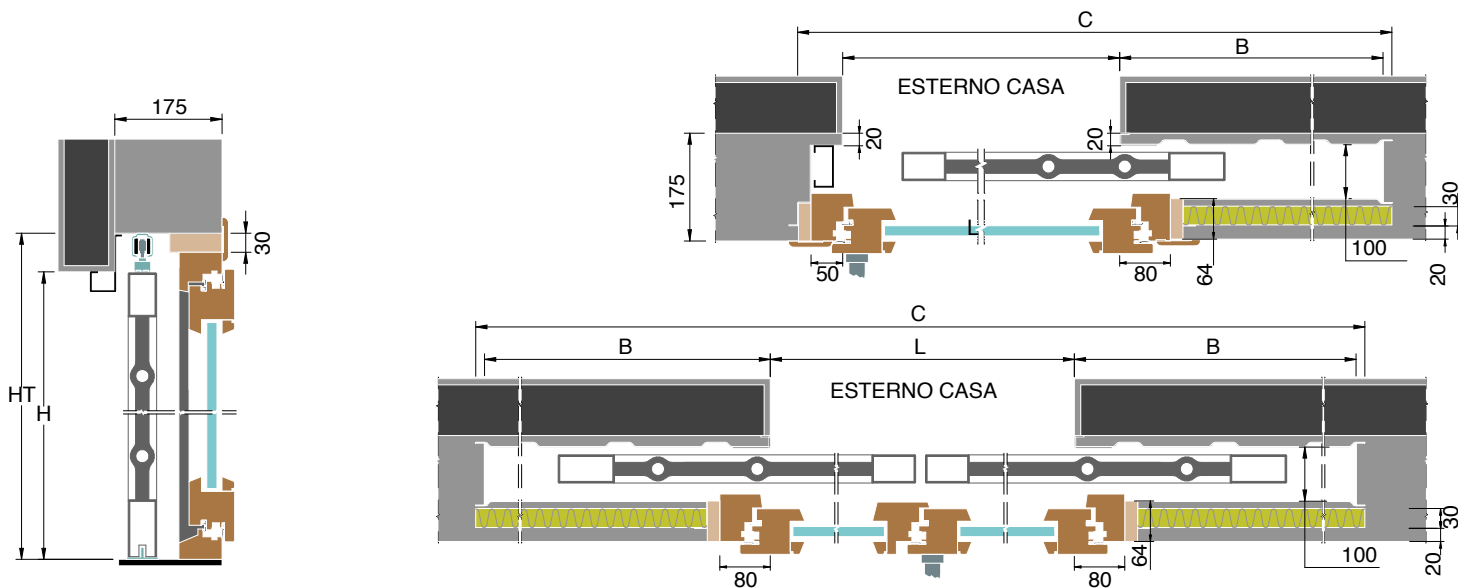

Spessore max anta interna
55

Luce Architettonica Singolo			
L	H	SP	SI
600÷1800	800÷1400	175	100
600÷1800	1401÷1800	175	100
600÷1800	1801÷2300	175	100
600÷1800	2301÷2600	175	100
600÷1800	2601÷2900	175	100

Luce Architettonica Doppio			
L	H	SP	SI
1200÷3600	800÷1400	175	100
1200÷3600	1401÷1800	175	100
1200÷3600	1801÷2300	175	100
1200÷3600	2301÷2600	175	100
1200÷3600	2601÷2900	175	100



### Scheda tecnica



### Ingombro in Larghezza

Singolo - Luce architettonica  
(L) x 2 + 125

(Es. 800x2+125 = 1725)

Doppio - Luce architettonica  
(L) x 2 + 50

(Es. 1600x2+50 = 3250)

### Ingombro in Altezza

Luce architettonica (H) + 80

(Es. 2100+80 = 2180)



### Fuori standard

Dimensioni realizzabili:  
L Variabili da mm 1500

a mm 1800 singolo;

L Variabili da mm 3000

a mm 3600 doppio



### Caratteristiche

- Resistenza al carico di vento
- Permeabilità all'aria
- Tenuta all'acqua
- Resistenza all'urto

### Accessori

- Grata di sicurezza