


# Luminox Double Door

Plastered and plasterboard wall



## Luminox double door

plastered and plasterboard wall

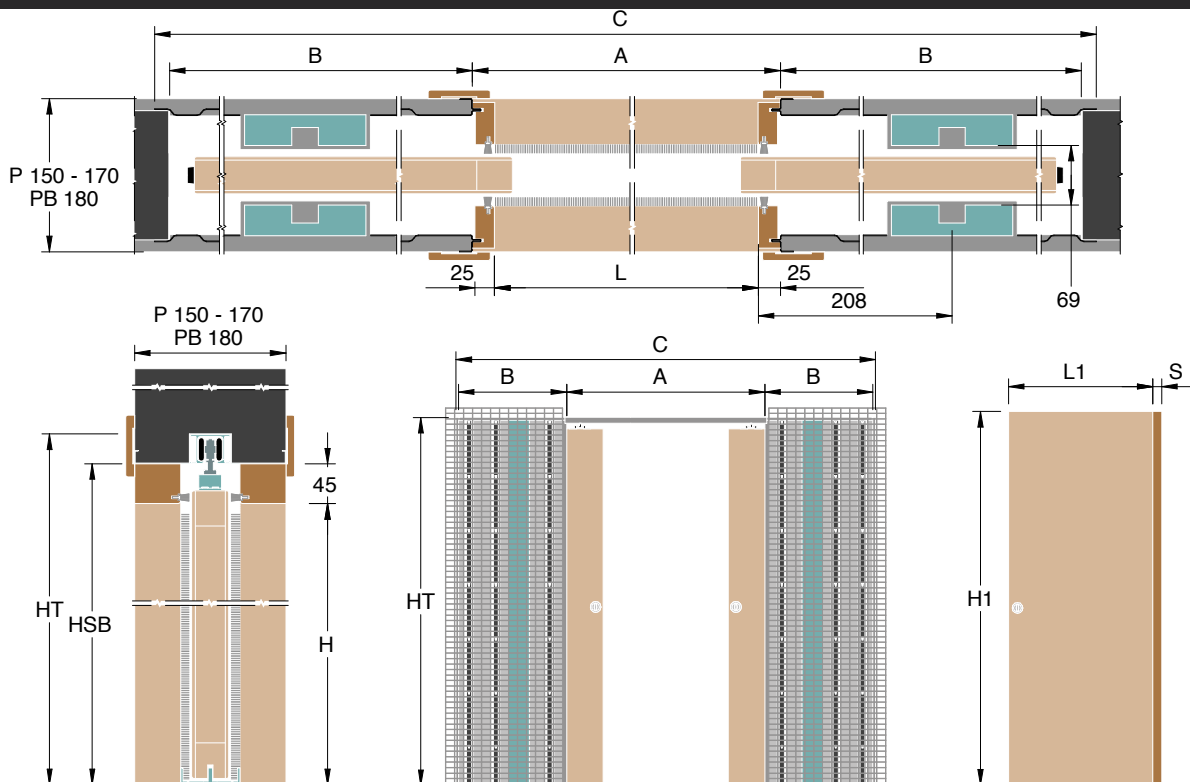

FINISHED WALL	CAVITY SIZE	BOX THICKNESS
<b>PLASTER</b>		
150	69	40
170	69	50
<b>PLASTERBOARD</b>		
180	69	50
Door thickness "S" 42		

COD.	PASSAGE OPENING L X H	DOOR SIZE L1 X H1	A	B	C	HSB	HT
ILU.060DB	1200 X 2100	615 X 2110	1250	600	2500	2145	2180
ILU.060DA	1200 X 2000	615 X 2010	1250	600	2500	2045	2080
ILU.070DB	1400 X 2100	715 X 2110	1450	700	2900	2145	2180
ILU.070DA	1400 X 2000	715 X 2010	1450	700	2900	2045	2080
ILU.080DB	1600 X 2100	815 X 2110	1650	800	3300	2145	2180
ILU.080DA	1600 X 2000	815 X 2010	1650	800	3300	2045	2080
ILU.090DB	1800 X 2100	915 X 2110	1850	900	3700	2145	2180
ILU.090DA	1800 X 2000	915 X 2010	1850	900	3700	2045	2080
ILU.100DB	2000 X 2100	1015 X 2110	2050	1000	4100	2145	2180
ILU.100DA	2000 X 2000	1015 X 2010	2050	1000	4100	2045	2080

### ATTENTION

Do not use door panels thicker than the size expressed in the table

Two back boxes are provided in standard equipment (only for 150mm walls)



Technical sheet



### Overall length

Passage opening (L) x 2 + 100  
(Example 1600x2+100 = 3300)

### Overall height..

Passage opening (H) + 80  
(Example 2100+80 = 2180)



### Custom size

Available dimensions:  
H From 1000 to 2700 mm  
L From 600+600 to 1500+1500 mm



### Accessories

- Easy-Stop
- Simultaneous opening
- Sliding kit for glass door
- 120 kg track kit
- Under door profile
- Mag Evo