



Absolute Evo Single Door

Plastered and plasterboard wall



Absolute Evo single door

plastered and plasterboard wall

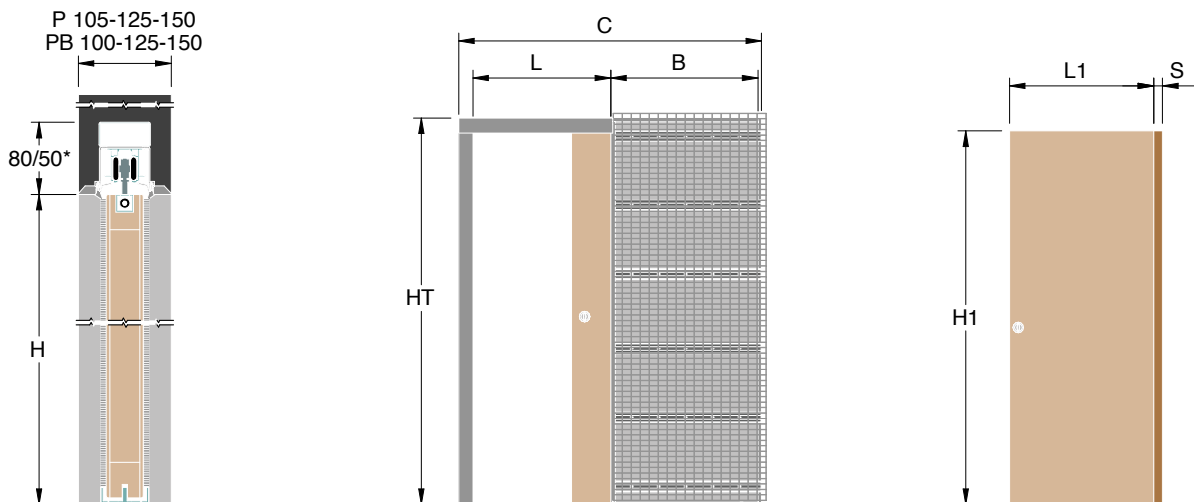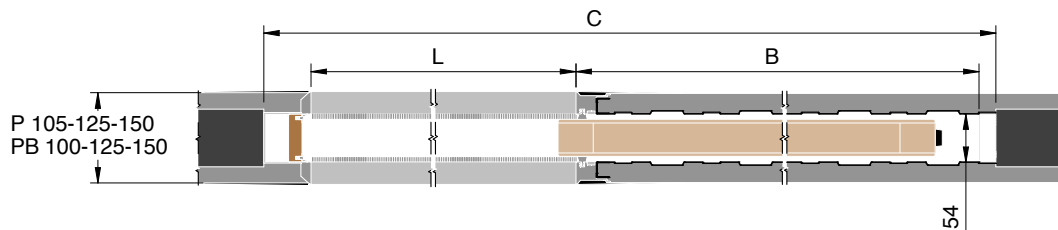


*80 for finished wall size 100-105-125
50 for finished wall size 150

FINISHED WALL	CAVITY SIZE	DOOR THICKNESS "S"
PLASTER		
105	54	42**
125	54	42**
150	54	42**
PLASTERBOARD		
100	54	42**
125	54	42**
150	54	42**

COD.	PASSAGE OPENING L X H	DOOR SIZE L1 X H1	L	B	C	HT
IAB.0605B	600 X 2100	615 X 2092	600	640	1310	2180
IAB.0605A	600 X 2000	615 X 1992	600	640	1310	2080
IAB.0705B	700 X 2100	715 X 2092	700	740	1510	2180
IAB.0705A	700 X 2000	715 X 1992	700	740	1510	2080
IAB.0805B	800 X 2100	815 X 2092	800	840	1710	2180
IAB.0805A	800 X 2000	815 X 1992	800	840	1710	2080
IAB.0905B	900 X 2100	915 X 2092	900	940	1910	2180
IAB.0905A	900 X 2000	915 X 1992	900	940	1910	2080
IAB.1005B	1000 X 2100	1015 X 2092	1000	1040	2110	2180
IAB.1005A	1000 X 2000	1015 X 1992	1000	1040	2110	2080

ATTENTION
Door thickness shall not differ from size in the table.

** Door thickness includes glass frames. The net passage opening is reduced by 10mm.
(Example: passage opening 800mm = Net opening 790mm)

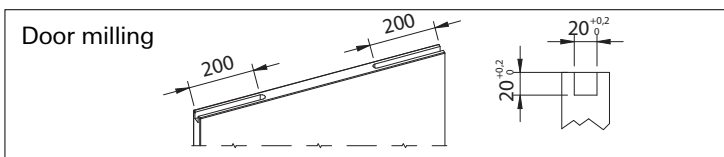

Technical sheet



Overall length

Passage opening (L) x 2 + 110
(Example 800x2+110 = 1710)

Overall height..

Passage opening (H) + 80
(Example 2100+80 = 2180)

For finished wall size mm 150

Passage opening (H) + 50
(Example 2100+50 = 2150)



Custom size*

Available dimensions: H From 1000 to 2600 mm (for systems higher than 2100, finished wall width 125/150). - L From 600 to 1200 mm (for systems larger than 1000, finished wall width 125/150).

* The technical department reserves the right to evaluate custom size feasibility.



Accessories

- Glass Kit
- 120 kg track kit
- Under door profile
- Easy-Stop AB